

200W CONSTANT VOLTAGE LED POWER SUPPLY

Features :

- European standard AC input range (220-240VAC)
- IP67 grade, Aluminum shell
- Types of protection : Short circuit / Over load / No Load
- Natural air cooling, High reliability
- 100% full load aging test
- Suitable for LED lighting and other 12VDC driver applications
- Comply with the world lighting safety code
- Comply with the Class 1 insulation grade, Class 1 leakage protection grade
- 5 years quality guarantee



Input Specifications

Parameter	Min.	Typ.	Max.	Notes
Mains supply voltage	220VAC	-	240VAC	
Input AC Current	-	0.96A	-	Full load at 230 Vac/50Hz input
Input Frequency	-	50/60Hz	-	
Power Factor	-	≥ 0.96	-	230Vac/50Hz, full load
Efficiency	92%	-	-	230Vac/50Hz
Dimmability				not dimmable

Output Specifications

Parameter	Min.	Typ.	Max.	Notes
Output Voltage	11.88VDC	12.0VDC	12.24VDC	Depends of mains supply voltage range, LED Modules Load, temperature conditions
Output Current	-	-	16.67	230 Vac/50Hz
Output Power	-	-	200W	230 Vac/50Hz
Voltage Ripple & Hoise (Vp-p)	-	150mV	-	230Vac/50Hz, full load

Protection Functions

Parameter	Min.	Typ.	Max.	Notes
Over Load protection	-	-	-	Yes. Self-recovering. Depends of mains voltage and LED Modules load. Please take attention of LED Modules load and connections.
Short circuit protection	-	-	-	Yes. Self-recovering
No load operation	-	-	13.2V	Yes. Self-recovering

200W CONSTANT VOLTAGE LED POWER SUPPLY

General Specifications

Parameter	Min.	Typ.	Max.	Notes
Efficiency	92%	-	-	
No Load Power Dissipation	-	-	3W	
Life Time	-	5years	-	Depends of Tc and LED Modules load
Dimensions (L x W x H)/Weight	188*72*52mm/1.0kg		With shell	
Fixing dimensions	200.0mm			
Mounting	4xM4 screws			
Housing	Metal			
Inputs - wire cross-section	3x0.75mm ²			
Outputs- wire cross-section	2x2x1.5mm ²			

Environmental Specifications

Parameter	Min.	Typ.	Max.	Notes
Operating ambient temperature	-20°C	-	50°C	Humidity: 15% RH to 90% RH. Depends of LED Modules load. See Derating Curve for more details
Temperature of Tc point	-20°C	-	80°C	Humidity: 15% RH to 90% RH. Depends of LED Modules load and Ta. See Derating Curve for more details
Storage Temperature	-20°C	-	80°C	
Storage humidity	20~95% RH no condensation			
Waterproofing Grade	-	-	IP67	

Safety&EMC compliance


Category	Standard
CE	
LVD	EN 61347-1, EN61347-2-13*
EMC	EN 55015, EN 61000-3-2, EN 61000-3-3, EN 61000-4-4, EN 61000-4-5, EN 61547
Withstand Voltage	I/P ~ O/P:3750VAC/50Hz 1min, I/P ~ CASE:2000VAC/50Hz 1min, O/P ~ CASE:1500VAC/50Hz 1min
Insulation Impedance	I/P ~ O/P, I/P ~ FG : 100M Ohm/500VDC/25°C/70%RH

* Safety class I, galvanic isolated I/O, SELV output


Standard	Notes:
EN 55015	Conducted Emission Test & Radiated Emission
EN 61000-3-2	Harmonic Current Emissions Class C
EN 61000-3-3	Voltage Fluctuations & Flicker
EN 61000-4-4	Electrical Fast Transient / Burst
EN 61000-4-5	Level 3 is strictly tested, L-N:2KV: L/N-GND:4KV
EN 61547	Electromagnetic Immunity Requirements Applies to Lighting Equipment

200W CONSTANT VOLTAGE LED POWER SUPPLY


- Derating Curve

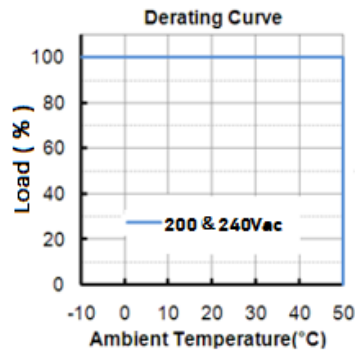

- Life Time vs. Ambient Temperature Curve

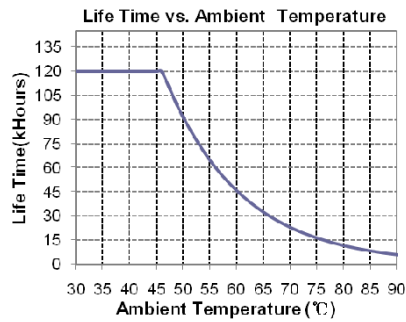

- Efficiency vs. Load

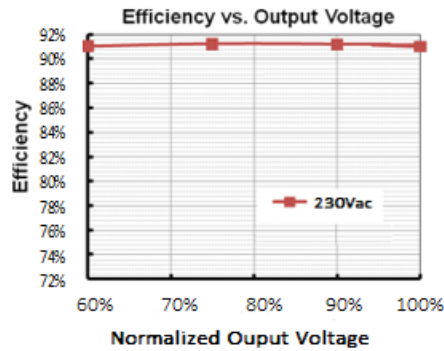

Modified Date	Rev.	Description of Change		
		Item	From	To
15.12.2021	1	Datasheet Release	/	/